
[User's Manual]

Product picture

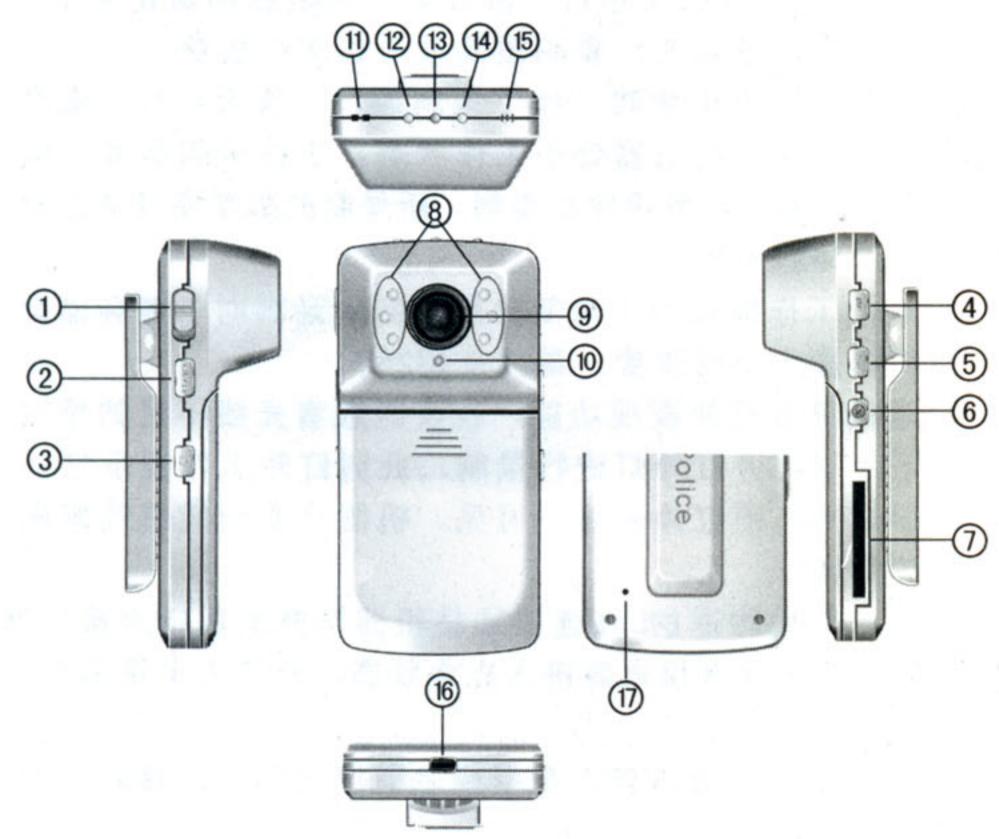

- 1.HOLD
- 2.Power on/off
- 3.Infrared Light Swith
- 4.REC record Swith
- 5.Stop Button
- 6. Laser Positioning Light Switch
- 7.SD Card Slot
- 8.Infrared Light
- 9.Camera

- 10.Laser Positioning Light
- 11. Hang Line Button
- 12.Power on/Work Indication
- 13. Low Power/Charger Indicator
- 14.Infrared Work Indicator
- 15.MIC
- 16.USB Port (For charging)
- 17.RESET Button

Using Summarize

- 1. First, open the HOLD button, and then press the Power On button, at that time, the Power On Indicator will light on "blue", when the initialization of the machine was completed, the Power On Indicator was extinguished too, which indicate the machine is the normal work state.
- 2.When you need to record, press the record button, the Work Indicator--blue light shine, indicate the machine is the work state. Press the Stop button, the machine will stop to record. The recording file is saved in the SD/MMC card.
- 3. The work model records in hours and in turn. The time of recording depends on the internal memory, the greatest memory support is 2GB.
- 4. The machine have the infrared function and can record clearly in the night. When you want to record in the night or the ray is not bright, please press the Infrared Light Switch, then the Infrared Work Indicator will light on "green", and the machine will record the video in white and black.
- 5. Connect the charger to your machine with USB, plug the other end of charger to power socket. The charging indication lamp will light on "red" during charging.
- 6. The machine have not prepared the internal memory, so before your record, please insert the SD/MMC card.

Basic Parameter

Size:100*48*16mm Vedio Format:AVI weight:78g Vedio Size:320*240

Memory:SD/MMC Card Camera Distance:0.8~Infinite

Power:Li-ion battery File Length:5-8M

 No further notice will be given for any modification of the technical specification.